

Keyword:
XOL – Extended Operating Life

Model: **SL-860**

Performance Data **Size AA**
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	2.4 Ah
Nominal current	1 mA
Max. continuous discharge current	60 mA
Max. pulse current capability	120 mA
Anode surface area	14 cm ²
Lithium content	0.65 g
Weight	18 g
Volume	8 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +25°C

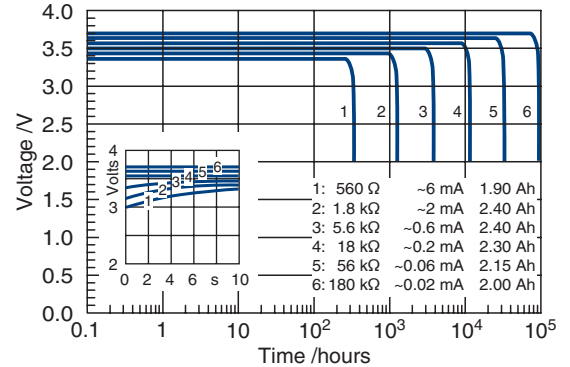

Available Capacity

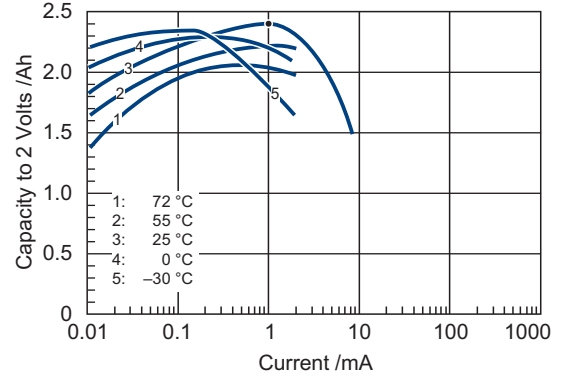

Operating Voltage

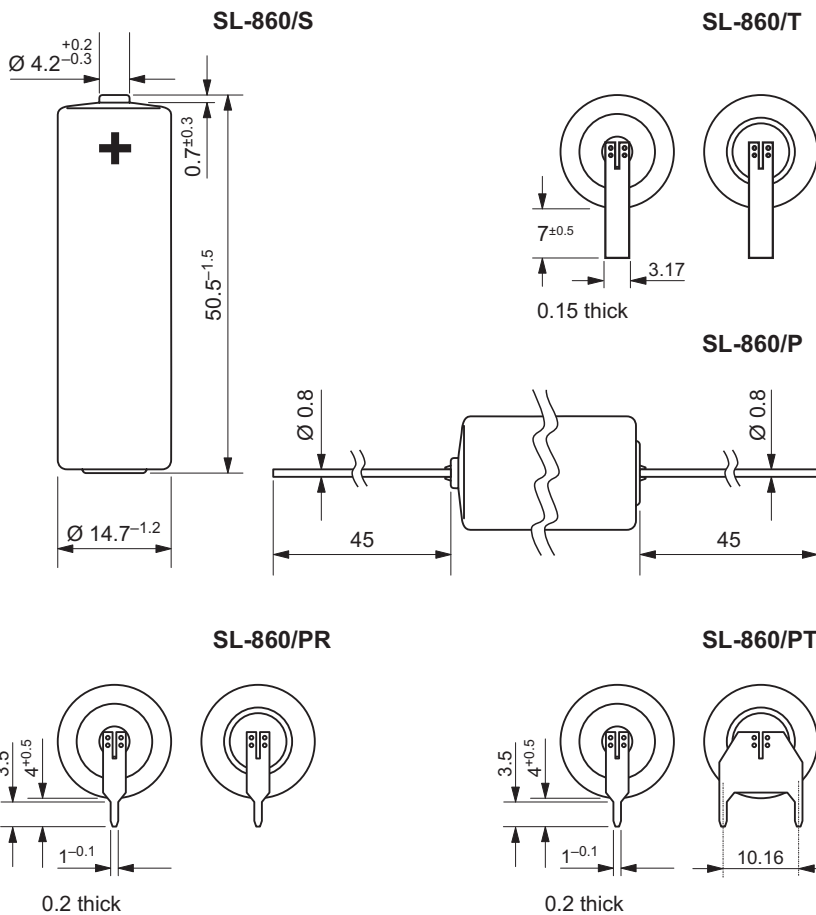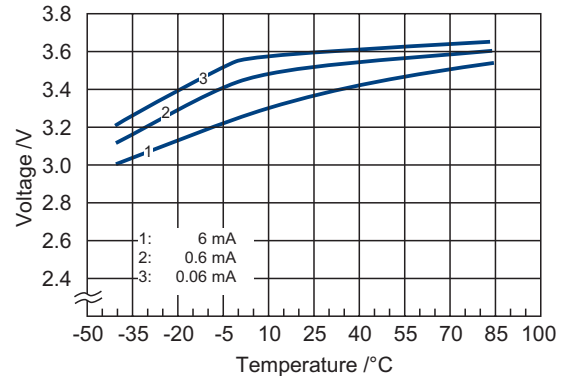

Available Terminations

SL-860/S	Standard
SL-860/T	Tags
SL-860/P	Pins
SL-860/PR	Pins Radial
SL-860/PT	Polarized Tags

Catalogue No.

11 1 08601 00
11 1 08602 00
11 1 08603 00
11 1 08606 00
11 1 08608 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.