


Data sheet Product SLV W 4 080 40 G

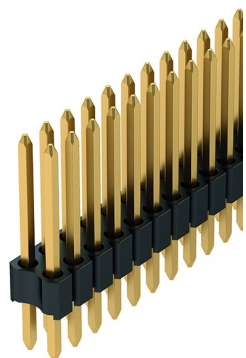

PCB connectors>Male headers

- two rows 4-72 contacts
- grid spacing 1.27 x 1.27 mm

Features

grid:	1.27 mm
no. of contacts:	40
contact material:	CuZn-alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> • Ni+$\geq 0.2\mu\text{m}$ Au • Ni+4...$6\mu\text{m}$ Sn
version:	standard
volume resistance:	$\leq 5 \text{ m}\Omega$
nominal current:	1.5 A
nominal voltage:	125 V AC
test voltage:	300 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> • $-40^{\circ}\text{C} \dots +163^{\circ}\text{C}$ • $(260^{\circ}\text{C}/10 \text{ s})$
class of inflammability:	UL 94 V-0
specific insulation resistance:	$>10^7 \Omega \cdot \text{m}$
connection type:	THT (soldering)
reflow solderable:	yes

Technical Drawing

A:	12.2 mm
B:	2.5 mm
C:	8 mm