


VISIBLE LIGHT PRODUCTS

(Super White Light Emitting Diode)

REV:A
DATE:2001/9/29

ESD Products ! Class I


DEVICE NO:HB10b-439AWCA



LENS COLOR:

colored diffusion	colored transparent	white diffusion	✓	water clear
-------------------	---------------------	-----------------	---	-------------

PACKAGE DIMENSIONS:

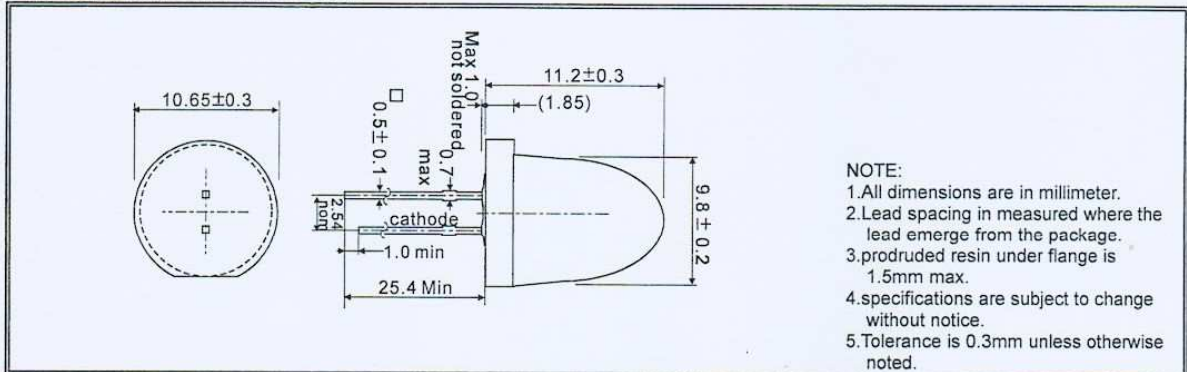

ABSOLUTE MAXIMUM RATINGS:

TA=25°C

PARAMETER	SYMBOL	MAX. RATING	UNIT
Power Dissipation	Pd	120	mW
Continuous Forward Current	IF	30	mA
Peak Forward Current *1	IFM	100	mA
Reverse Voltage	VR	4	V
LED Junction Temperature	Tj	100	°C
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C

Lead Soldering Temperature (1.6mm from case Bottom 260 °C for 5 seconds)

ELECTRIC-OPTICAL CHARACTERISTICS:

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
View Angle of Half Power	2θ1/2	IF=20mA		6		Degree
Forward Voltage	VF	IF=20mA		3.6	4.0	V
Reverse Current	IR	VR=4V			60	uA
Luminous Intensity *2	IV	IF=20mA	7000	16000		mcd
Chromaticity Coordinates	x	IF=20mA	0.22	0.29	0.36	
	y	IF=20mA	0.22	0.30	0.38	
Dominate Wave Length *3	λd(HUE)	IF=20mA		---		nm
Spectrum Width of Half Valve	Δλ	IF=20mA		---		nm

*1.Duty Ratio=1/10,Pulse Width=0.1ms.

*2.Tolerance:30% measuring equipment :EXELTRON 2001.

*3.The dominate wavelength is derived from the CIE Chromaticity Diagram and represents the color of the device.

管制文件
禁止複製