


SPECIFICATION	
MATERIAL	Insulator: PA9T, Rated UL94V-0 Contacts: PhosPhor Bronze Shell: Stainless Steel
CONTACT PLATING	Underplate: 50μ" Nickel Contact Area: 15μ"~30μ" Selective Gold Solder Tails Area: 100μ" Tin/Lead Free(Brighten Tin/Matte Tin)
ELECTRICAL	Operation Voltage: 3.3 V Current Rating And Votage: 0.5A 125V,AC Contact Resistance: 40 mΩ Initial(500mΩ After Endurance Test) Insulation Resistance: 1000 MΩ min @ 500 VDC Dielectric Withstanding Voltage: 250 VAC / minute Operating Temperature: -20°C TO +60°C Mating Cycles: 12,000 Insertions(Office Environment)

108C-T  
1 2 3 4 5

- 1.T:Top Mount
- 2.Contact Plating  
A:15u" gold plating  
B: 3u" gold plating
- 3.Stand Off Dimention  
A:0mm
- 5.RoHS Compliant

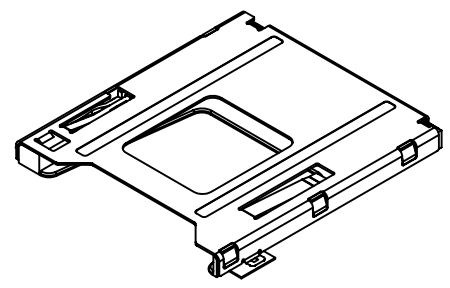

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2

**Attend**  
ATTEND TECHNOLOGY INC.  
TEL:886-2-26987028 FAX:886-2-26987078

SCALE: AS SHOWN	UNIT: mm
DRAWN Terry	07/12/05
CHECKED	/ /
APPROVED	/ /

DRAWN NAME:  
MS-Duo Push Push Type  
CONNECTOR  
PRODUCT NO. 108C-TAA0-R  
FILE NAME: 108C-TAA0-R

REV.	DESCRIPTION	DATE