

# Ninigi

## D A T A S H E E T


### ZL303 SERIES 2.00 MM (0.079") PIN HEADER SINGLE ROW



#### Specification:


- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 MW
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy

Series No.	No. of Contact (N)	Contact Plating
ZL303-10P-T	1 x 10	Tin
ZL303-10P	1 x 10	Gold
ZL303-20P-T	1 x 20	Tin
ZL303-20P	1 x 20	Gold
ZL303-40P-T	1 x 40	Tin
ZL303-40P	1 x 40	Gold

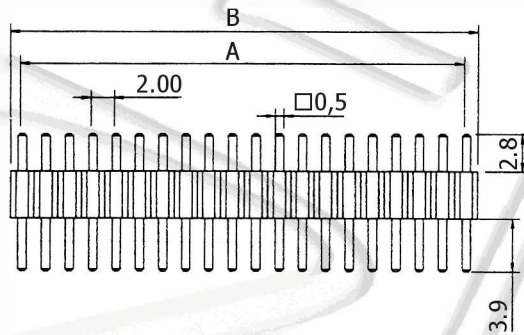

$$A = 2.00 * (N-1)$$
$$B = 2.00 * N$$

Pitch: 2.00 mm



All dimensions in mm.